


**Needed Equipment**

- 1) Phillips Screwdriver, P2 size.
- 2) Rack mount hardware kit # RM210.




**Important Safety Information**




- Remove power at all times while conducting removal / installation of rack mount hardware.
- Use only the fasteners provided by AudioControl. We have included extras in the kit.



- 1) Remove Power Cord from the Bijou 600 units.
- 2) Mount one rack ear on the left side of one Bijou 600 and the other ear on the right side of the other Bijou 600.
  - a) Locate the two screws on the side of the product near the front panel.

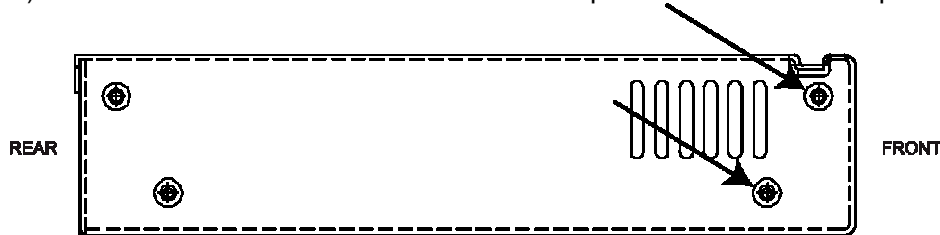

- b) Remove and **SAVE** these screws. Do not remove any other screws.
- c) Place the short ear over the cover with the mounting flange forward.
- d) Reinstall the two screws removed earlier.

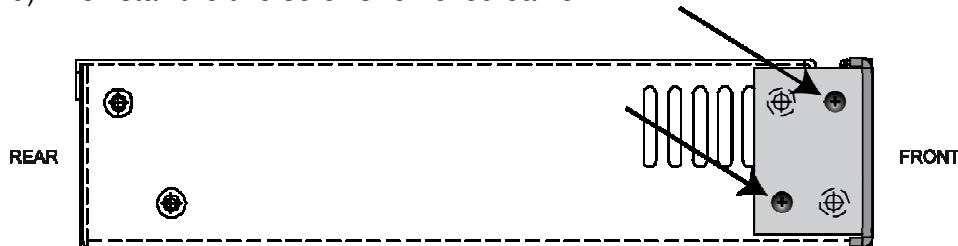


- 3) Mount one middle bracket to each Bijou 600.
  - a) Locate the four screws on the side of the product without a rack ear.




- b) Remove and **SAVE** these screws. Do not remove any other screws.

- c) Arrange one middle bracket next to the side of the Bijou 600 with the flange on the bracket towards the front of the Bijou 600.

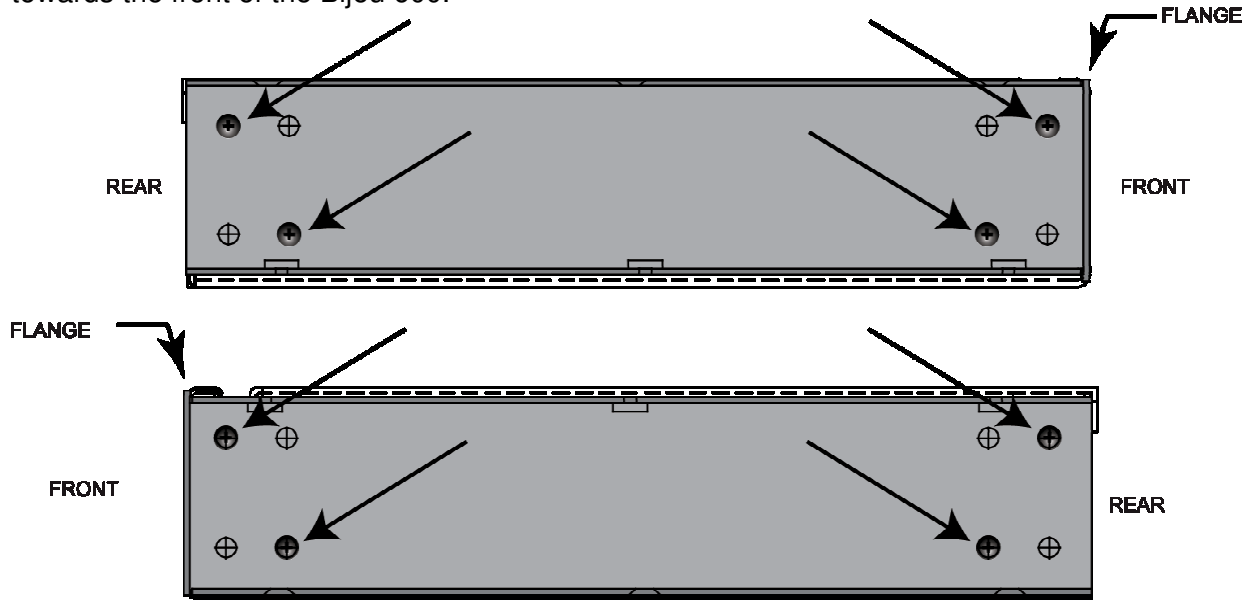

- d) Use the eight #6-32 pan head screws provided in the kit to mount a bracket to each Bijou 600.
- e) Use six of the #6-32 countersink screws removed from the product to join the two middle brackets together. Ensure that the brackets are nested so that countersinks are exposed.

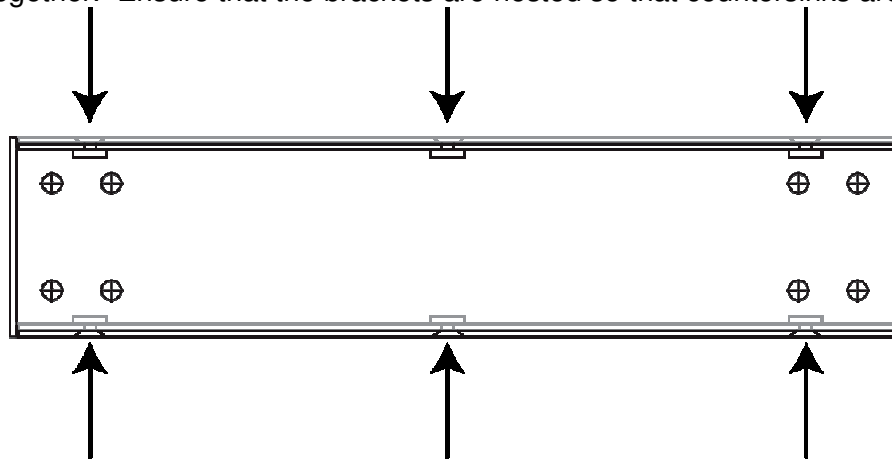

- 4) Mount the assembly to the rack.
  - a) We have included four #10-32 screws in your kit for this purpose.