

ARCHITECT
MODEL 210 - MODEL 110

AudioControl®


Immense Power



Architect Model 210

Superb Sound & Amazing Efficiency

240 watts per channel
2 ohm stable

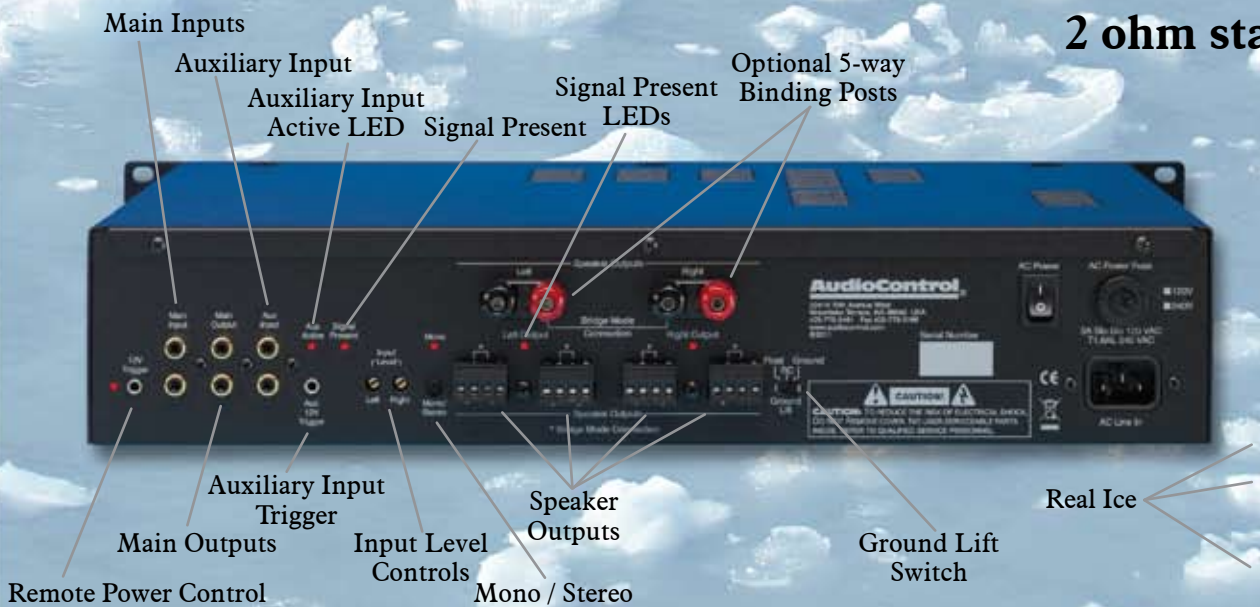

AudioControl

For Those Who Consider Perfection Possible®
www.audiocontrol.com

5-Year
Warranty


ARCHITECT

MODEL 210 - MODEL 110

Superb Sound and Amazing Efficiency

Do you want superb sound quality while driving eight speakers from a two-channel distributed audio amplifier? Want AudioControl legendary reliability and speaker equalization with amazing energy efficiency? The waiting is over as AudioControl is now shipping their new high powered, great sounding stereo amplifier, the Architect Model 210. All of these are standard features of the new AudioControl Architect Model 210 amplifier as it will comfortably drive eight speakers (stable into 2 ohms) and has an astonishingly low energy usage, meeting the new stringent Energy Star 2 requirements.

AudioControl "Cool" Design

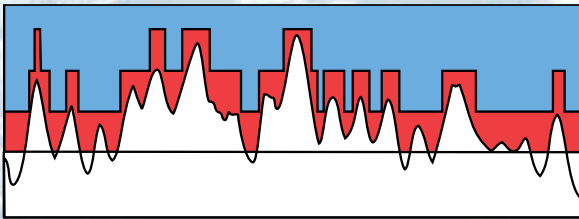

AudioControl amplifiers have an innovative power supply that acts as a transmission, shifting up and down. This keeps them running cool and energy efficient.

SPECIFICATIONS

ARCHITECT MODEL 110/210 SERIES SPECIFICATIONS

Power Output (All Channels Driven)

2 ohm (Less than .9% THD)..... 240 Watts

4 ohm (Less than .9% THD)..... 120 Watts

8 ohm (Less than .9% THD)..... 60 Watts

8 ohm (Bridged Mono) 410 Watts

Minimum Speaker Load 2 ohms

Signal to Noise >105dB, A-wtd, Ref, Full Output

Equalizer Center Frequencies

45, 150, 300, 700, 2500 and 12KHz

Protection. clipping, short circuit, thermal, ultrasonic, DC offset Stable into reactive or mismatched loads

Clipping Eliminator.....
Wideband, intelligent, soft response

Signal Sense Trigger..... 0.001 volt (Very Low!)

Weight 16 pounds (35 kg)

Dimensions..... 17"W x 12"D x 3.5"H

In Rush Current..... active limited, soft start

Current Consumption (All Channels Driven)

Standby <1 Watt

Idle..... 8 Watts

1/8th Power (loud listening level)..... 30 Watts

Full Power..... 550 Watts

Heat Dissipation (All Channels Driven)

Idle..... 25 BTU/ Hour

1/8 Power (loud listening level) 20 BTU/ Hour

Full Power (worst case) 490 BTU/ Hour

Country of Origin..... USA



AudioControl®

For Those Who Consider Perfection Possible®

22410 70th Avenue West • Seattle, WA 98043 USA • 425-775-8461 • Fax 425-778-3166

www.audiocontrol.com

©2011 AudioControl. All rights reserved.